




MASTERSHIFT


INSTALLATION INSTRUCTIONS

U.S. Patent No. RE 25,561 & 3,052,135

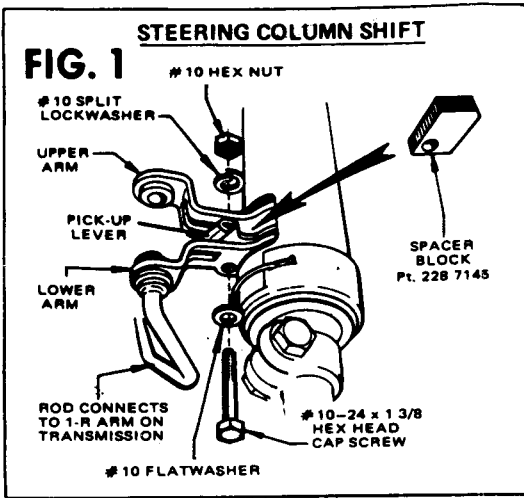

IMPORTANT WARNING

SAFETY STEERING COLUMN LOCK
 When this shifter is installed in a car that has a steering column lock, the operation of locking mechanism **MUST** be maintained. Install the reverse arm and connect the original factory linkage as directed by this instruction sheet.

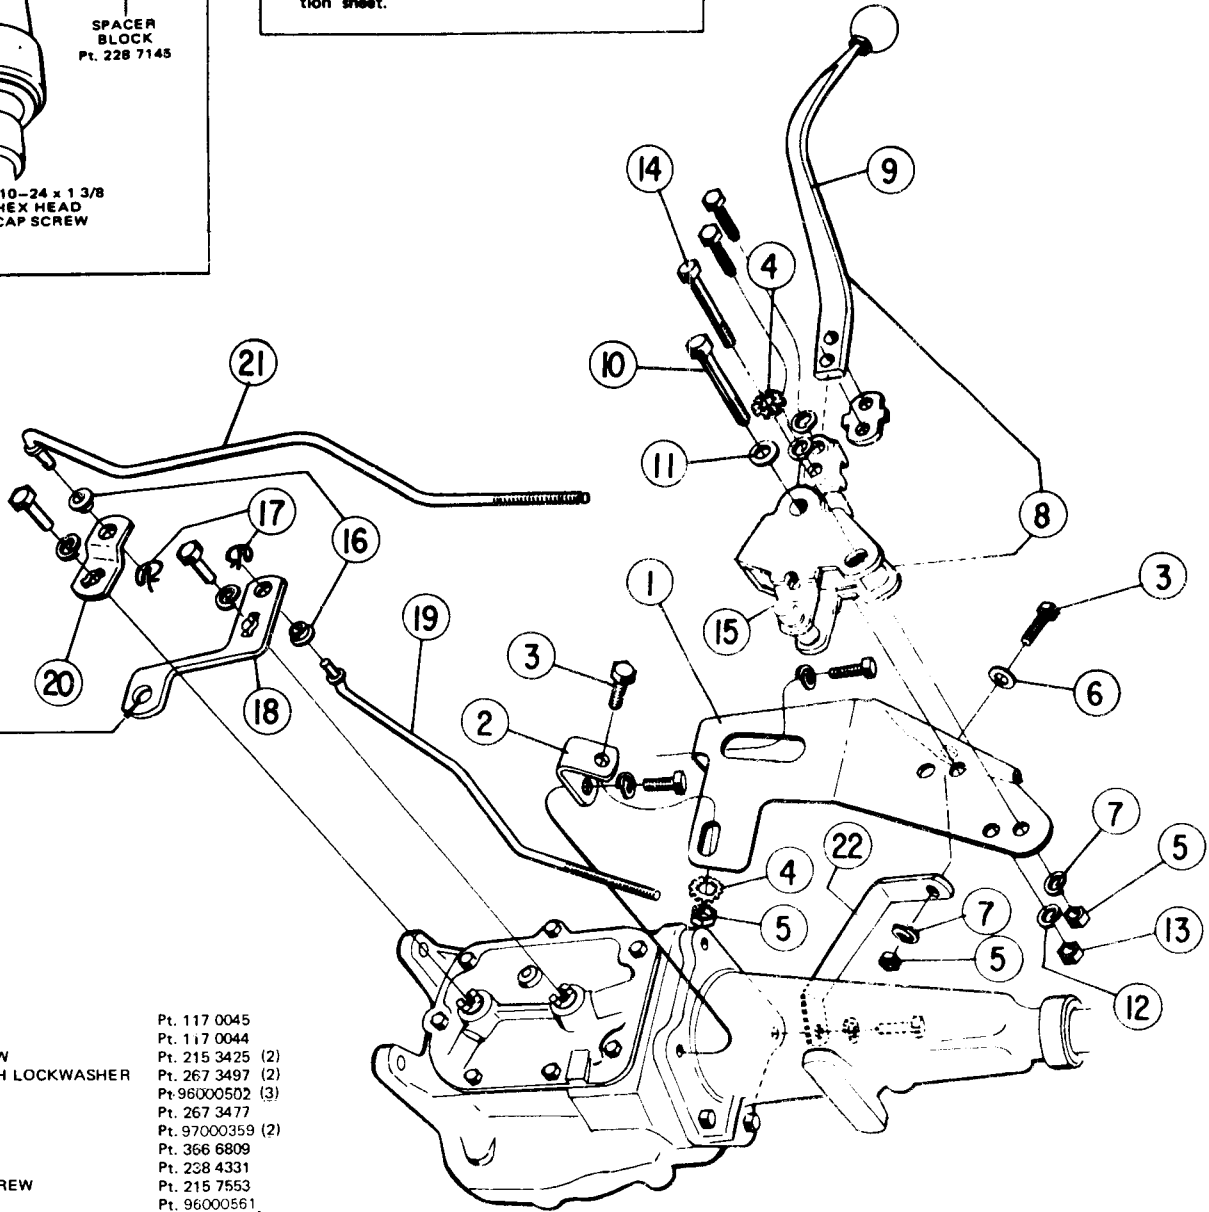

IF VEHICLE EQUIPPED WITH SAFETY STEERING COLUMN LOCK, ATTACH STOCK 1ST/REVERSE LINKAGE TO THIS HOLE. USE STOCK BUSHING & RETAINING CLIP TO FASTEN.

CONTENTS OF KIT

- | | |
|--|------------------|
| 1. BRACKET | Pt. 117 0045 |
| 2. BRACKET LEG | Pt. 117 0044 |
| 3. 3/8-16 x 7/8 HEX HEAD CAP SCREW | Pt. 215 3425 (2) |
| 4. 3/8" INTERNAL/EXTERNAL TOOTH LOCKWASHER | Pt. 267 3497 (2) |
| 5. 3/8-16 HEX NUT | Pt. 96000502 (3) |
| 6. 3/8" FLATWASHER | Pt. 267 3477 |
| 7. 3/8" SPLIT LOCKWASHER | Pt. 97000359 (2) |
| 8. SHIFTER & STICK ASSEMBLY | Pt. 366 6809 |
| 9. STICK | Pt. 238 4331 |
| 10. 7/16-20 x 2-3/4 HEX HEAD CAP SCREW | Pt. 215 7553 |
| 11. 7/16" FLATWASHER | Pt. 96000561 |
| 12. 7/16" SPLIT LOCKWASHER | Pt. 97000404 |
| 13. 7/16-20 HEX NUT | Pt. 97000467 |
| 14. 3/8-16 x 2-3/4 HEX HEAD CAP SCREW | Pt. 215 3448 |
| 15. ROD ADJUSTING BUTTON | Pt. 119 3783 (2) |
| 16. BUSHING | Pt. 118 1681 (4) |
| 17. SPRING CLIP | Pt. 97000015 (4) |
| 18. ARM 1ST/REVERSE | Pt. 105 7135 |
| 19. ROD 1ST/REVERSE | Pt. 213 0024 |
| 20. ARM 2ND/3RD | Pt. 105 7130 |
| 21. ROD 2ND/3RD | Pt. 213 0025 |
| 22. BRACE | Pt. 116 0007 |
| 23. SPACER BLOCK | Pt. 228 7145 |
| 24. #10-24 x 1-3/8 HEX HEAD CAP SCREW | Pt. 271 7151 |
| 25. #10 FLATWASHER | Pt. 97000905 |
| 26. #10 SPLIT LOCKWASHER | Pt. 267 3818 |
| 27. #10-24 HEX NUT | Pt. 179 7149 |

367 0006

ATTENTION

DUE TO VARIATIONS IN AUTO MANUFACTURING TOLERANCES, THE TRANSMISSION RODS SUPPLIED WITH THIS KIT MAY REQUIRE SLIGHT BENDING TO CLEAR OBSTRUCTIONS, ETC. PROTECT THREADS WHEN BENDING RODS.

BEND RODS COLD - DO NOT APPLY HEAT